

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/058065 A1

(51) International Patent Classification⁷: A61B 5/103

(21) International Application Number:
PCT/IB2002/005666

(22) International Filing Date:
30 December 2002 (30.12.2002)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicants and

(72) Inventors: ULLRICH, Guenther, Nino, Carlo [IT/IT];
Viale Trieste, 3, I-54100 Massa (IT). SALSEDO, Fabio
[IT/IT]; Via Umberto Primo, 100, I-04100 Latina (IT).
BERGAMASCO, Massimo [IT/IT]; Via Don Minzoni,
144, I-56011 Castelmaggiore (IT). VILLELLA, Paolo
[IT/IT]; Via Gentileschi, 8, I-56123 Pisa (IT).

(74) Agent: CELESTINO, Marco; ABM Agenzia Brevetti &
Marchi, Viale Giovanni Pisano, 31, I-56123 Pisa (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR GONIOMETRIC MEASUREMENTS

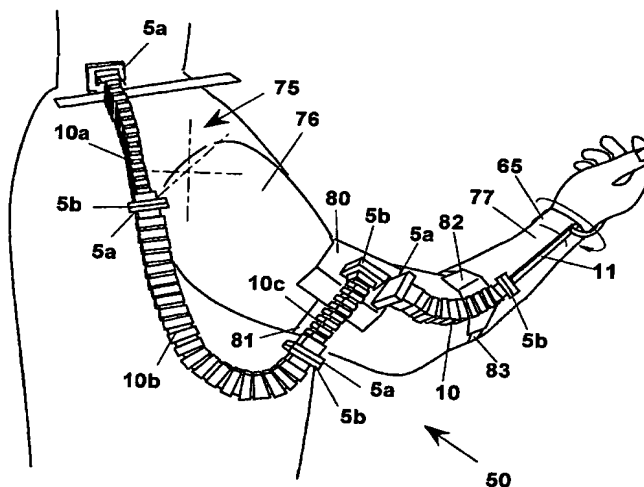

(57) Abstract: A device (1) for measuring the relative orientation according to at least one degree of freedom for two objects, comprising a constraint generator (10) suitable for causing a goniometric sensor (40) to move in a plane, having the function of measuring the variation of relative orientation of the two objects in this plane. The goniometric sensor (40) is arranged in a housing (41) that crosses longitudinally the constraint generator (10), which has high flexional stiffness in a first longitudinal plane (β) and a low flexional stiffness in a second longitudinal plane (ϕ) orthogonal to the first (β). The sensor measures rotations in a plane and the constraint generator induces a rotation in that plane. With the device (1) a data suit (50) can be made for measuring the movement of limbs of an individual. For example, arranging three devices (10a, 10b, 10c) in series, but capable of measuring angles in orthogonal planes, the rotation can be measured of the arm (76) with respect to a shoulder (75) of an individual.

BEST AVAILABLE COPY

- 1 -

TITLE

DEVICE FOR GONIOMETRIC MEASUREMENTS

Field of the invention

The present invention generally relates to a device for determining the angular position of an object.

5 In particular, the invention relates to a device for determining the relative angular position between two objects articulated to each other with at least one degree of freedom.

Furthermore, the invention relates in particular, but
10 not exclusively, to a device for determining the relative angular position of two limbs of the human body, for example the arm and the shoulder, the forearm and the arm, the wrist and the elbow, etc.

Background of the invention

15 The angular movements between objects that have one or more degrees of freedom are measurable with complex devices of various structure of mechanical, optical, electromagnetic nature, etc.

One of the fields in which the angular measures are
20 very important is that of the study of the posture of the human body by measure and control of absolute position data of single points of the body or of angular relative position of two adjacent limbs. On the basis of the data recorded a digital model of the human body is then
25 created.

Many are the possible applications, such as the production of digital movies or virtual reality, as well

- 2 -

as applications in the medical field, and deserve a space of primary importance in scientific research.

However some limits exist that define substantially the fields of applicability for each type of device. Such
5 limits are given mainly to the size of the limb that has to be monitored and to the number of degrees of freedom of the limb same.

In particular, the limbs with greater volume, such as arms and legs, have less degrees of freedom and the
10 devices used for detecting their motion have larger weight and encumbrance and require a higher rate of precision. The limbs with smaller volume, such as the fingers of the hands, have a higher number of degrees of freedom and the devices used for detecting their motion must have lower
15 weight and encumbrance and require a lower rate of precision.

The least expensive devices for detecting the movement of the limbs with greater volume are of mechanical type. They provide the use of rigid parts connected with
20 rotational and prismatic joints, measuring angular movements with potentiometers. Even if the costs of this technology are low, however the rigid structure has high encumbrance, it is heavy and the measures obtained are usually not so precise.

25 Also magnetic sensors exist, which require one or more transmitters for creating a magnetic field in a determined workspace. However, they have high costs and have the further drawback of being particularly affected by the presence of metal that can distort the magnetic field.

- 3 -

The optical sensors, finally, require optical tracers, active or reflective, whose light is captured by cameras for then analysing the position data by means of a computer. Usually, the optical devices are less bulky of the magnetic, but their correct operation can be affected by parts of the body that cross accidentally the light path. Other drawbacks of the optical devices are high costs and the need for post-processing the measured data as well as the long set-up time for the measuring equipment.

Another system of "motion capture" for the human body is described in US6050962. It provides angular sensors of resistive type or "resistive bend sensors" arranged at the joints, associated to auxiliary articulated connections formed by a plurality of links hinged in turn. The links form a chain that can rotate in a single plane. Consecutive portions of chain can rotate in different planes connected to each other by stiff or articulated junction elements. The angular sensors are in particular resistive segments that measure the rotations of the limbs to which they are applied, or of portions of them. The resulting device is structurally complex and expensive.

Summary of the invention

It is therefore object of the present invention to provide a device for measuring the relative orientation of at least a first object with respect to a second object, in particular but not exclusively limbs of the human body, which is structurally easy and not expensive to make, and that does not present the drawbacks of the prior art.

- 4 -

It is another object of the present invention to provide such a device that is light and has low encumbrance.

It is a further object of the present invention to
5 provide such a device that is capable of measuring the angular rotation with sufficient precision.

These and other objectives are accomplished by the device for measuring the relative orientation of at least a first object with respect to a second object free from
10 said first object, or connected to it but with independent movement, wherein said orientation is carried out according to at least one degree of freedom comprising:

- at least one goniometric sensor for said or each degree of freedom suitable for measuring the variation of
15 orientation in a plane;
- at least one constraint generator for said or each goniometric sensor for causing the latter to move in said plane;

whose characteristic is that said or each constraint
20 generator is an elongated flexible element, having a longitudinal axis, with a flexional stiffness remarkably lower in a first plane passing through the said axis and a flexional stiffness remarkably higher in a second plane orthogonal to said first plane and passing through the said
25 axis, whereby said element is substantially flexible only in said first plane. Furthermore, said flexible element has also high stiffness to torsion and to elongation.

- 5 -

In particular, the goniometric sensor measures the relative angular movement of the two objects in the bending plane of the constraint generator.

Advantageously, said or each goniometric sensor is
5 located in a housing that crosses longitudinally said constraint generator.

Alternatively, the sensor is made in the flexible element same.

Advantageously, said or each constraint generator has
10 a plurality of substantially parallel portions having larger cross section alternated to portions coaxial to the previous but with smaller cross section.

In a first embodiment, at the portions having smaller cross section flexible elements are arranged, or lamellar
15 hinges, suitable for allowing the mutual rotation of said portions having larger cross section only in the bending plane of the constraint generator.

Alternatively, said or each constraint generator is a plate shaped element from which projections extend
20 substantially bellow-like. In particular, said bellow-like projections have structure chosen among: helical; alternated annular portions having larger and smaller cross section.

Preferably, the constraint generator has flanges at its ends orthogonal to said axis for connecting more
25 constraint generators 1 in series or for connecting to the objects whose rotation must be detected.

Preferably, the goniometric sensor for measuring the relative rotation of the ends of said constraint generator comprises:

- 6 -

- a flexible elongated element that extends between said ends, said element having a neutral axis which does not change its own length when bending, and at least one fibre spaced apart from said neutral axis and that extends from said first to said second object;
- means for measuring the length variation of said fibre as the relative rotation varies between said first and said second object, said relative rotation being proportional to said length variation.

According to a particular aspect of the invention, when said first object can rotate about more axes with respect to said second object, the use is provided of a plurality of constraint generators connected rigidly in series at the respective ends and in particular a constraint generator for each axis of rotation, or rotational degree of freedom, and oriented according to different planes of flexion, so that each sensor present in the corresponding constraint generator measures the bending in a different plane. In this case the relative rotational movement of the first object with respect to the second object is computed combining the measures of angular movements in each flexion plane.

This solution can be used, for example, if the movement has to be measured of the shoulder of an individual with respect to another point of the body. In this case, considering the rotational constraint of the arm with respect to the shoulder as a ball joint, a device can be used for measuring the rotation of the arm with respect to the shoulder comprising in series three constraint

- 7 -

generators integrated to three goniometric sensors according to the invention. The first has a free end integral to the shoulder and is oriented for bending in a first plane, the second in a second plane orthogonal to the first and the third in a third plane orthogonal to the second with its free end integral to the arm.

Moreover, a device for measuring the rotation of the forearm with respect to the arm comprises a constraint generator and a relative goniometric sensor, with an end integral to the arm and the other end integral to the forearm.

A particular aspect of the invention relates to a device for measuring the rotation of the wrist of an arm comprising at least one goniometric sensor as above described. In particular, said or each goniometric sensor is arranged with an end integral to the wrist and with the other end constrained to a second point of the arm that during the rotation of the wrist remains substantially fixed, for example to the elbow. Therefore, the goniometric sensor measures the rotation of the wrist with respect to the second point of the arm.

According to another particular aspect of the invention, a data suit for measuring the angular rotation of the arm with respect to the shoulder, of the forearm and of the wrist with respect to the arm of an individual comprises:

- a device for measuring the rotation of the arm with respect to the shoulder as above described;

- 8 -

- a device for measuring the rotation of the forearm with respect to the arm, as above described, arranged orthogonally to said device for measuring the rotation of the arm with respect to the shoulder;
- 5 - a device for measuring the rotation of the wrist, as above described, having an end rigidly connected to said device for measuring the rotation of the forearm with respect to the arm.

Brief description of the drawings

10 Further characteristics and the advantages of the device according to the present invention will be made clearer with the following description of an embodiment, exemplifying but not limitative, with reference to the attached drawings, wherein:

- 15 - figure 1 shows a top plan view of a constraint generator according to the invention;
- figure 2 shows a longitudinal sectional view according to arrows II-II of the constraint generator of figure 1;
- figure 3 shows an elevational side view of the
- 20 constraint generator of figure 1;
- figure 4 shows an elevational front view of the constraint generator of figure 1;
- figure 5 shows a perspective view of the constraint generator of figure 1;
- 25 - figure 6 shows a perspective view of a different embodiment of the constraint generator of figure 1;
- figure 7 shows a top plan view of the constraint generator of figure 6;
- figure 8 shows a longitudinal sectional view according

- 9 -

to arrows VIII-VIII of figure 7 of the constraint generator of figure 6;

- figure 9 shows a longitudinal sectional view according to arrows IX-IX of figure 8 of the constraint generator of figure 6;

- figure 10 shows a top plan view of a not helical embodiment of the constraint generator of figure 6;

- figure 11 shows a top plan view of three constraint generators rigidly connected and oriented on orthogonal bending planes, so that each sensor present in the relative constraint generator measures the bending occurring in the corresponding plane;

- figure 12 shows a top plan view of a device for measuring the angular rotation of the wrist and of the forearm with respect to the arm, according to the invention;

- figures 13 and 14 show respectively in a perspective view and a top plan view a data suit for measuring the angular rotation of the arm with respect to the shoulder, of the forearm and of the wrist with respect to the arm of an individual, according to the invention;

- figure 15 shows a longitudinal sectional view of a possible embodiment of a goniometric sensor suitable for being arranged in the constraint generator of figure 1 or of figure 6;

- figure 16 shows diagrammatically in a perspective elevational side view the data suit of figure 12 that an individual has put on;

- figures from 17 to 19 show a perspective view of a possible embodiment of a device for measuring the rotation

- 10 -

of the wrist, according to the invention.

Description of a preferred embodiment

In figures from 1 to 5 a device 1 is shown, according to the invention, for measuring the relative orientation according to at least one degree of freedom of two separated objects, or connected objects but having independent movement. It comprises a constraint generator 10 suitable for causing a goniometric sensor 40 to move in a plane for measuring the variation of relative orientation of the two objects in that plane.

As shown in the cross sectional view of figure 2, goniometric sensor 40 is arranged in a housing 41 that crosses longitudinally constraint generator 10. A type of goniometric sensor is shown in figure 15, and described hereinafter.

With reference to figure 5, constraint generator 10 has a longitudinal axis 8 and is equipped with a high flexional stiffness when bending in a first plane β passing through that axis 8 and a low flexional stiffness when bending in a second plane ϕ orthogonal to plane β and passing through axis 8 same. Therefore, constraint generator 10 is flexible only in plane ϕ and goniometric sensor 40 measures the relative angular movement of the two objects in this plane.

Always with reference to figure 1, constraint generator 10 has a plurality of substantially parallel portions having larger cross section 2 alternated to a plurality of portions coaxial to the previous having smaller cross section 3. In particular, the portions having smaller

- 11 -

cross section 3 allow bending and cause the mutual rotation of the portions having larger cross section 2 only in bending plane ϕ of constraint generator 10. In particular, narrower zones 3 are made as lamellar hinges that extend in
5 or parallel to plane β , and then allow bending only in plane ϕ . At the ends fastening flanges 5a and 5b are provided, for either connecting the constraint generators 1 in series according to orthogonal planes, or connecting the constraint generators to the objects whose rotation must be detected.

10 In an alternative embodiment of the invention and shown in figures from 6 to 10, constraint generator 10 can comprise a plate-shaped portion 6, with larger dimensions parallel to plane β and lower dimension in plane ϕ . From plate-shaped portion 6 substantially bellow like
15 projections 2 extend that are arranged helically in axial direction. At the end of plate 6 fastening flanges 5a and 5b orthogonal to plate 6 same can be, furthermore, provided.

Alternatively, as shown in figure 10, the bellow-like
20 shape is obtained by a plurality of rings alternated of diameter higher 2 and lower 3 that project from plate 6.

In both cases, plate-shaped portion 6 has flexional stiffness remarkably higher in plane β , and can bend in plane ϕ to it orthogonal. Furthermore, the bellow like
25 structure increases the torsional stiffness.

The constraint generator according to the invention in the various embodiments, and made in other equivalent ways, can be manufactured directly by moulding in a single element of plastics.

- 12 -

In figure 15 in a longitudinal sectional view a possible embodiment of goniometric sensor 40 is shown. On sensor 40 a neutral axis 100 in case of bending does not change its own length, and with numeral 105 a line is indicated eccentric to the neutral axis. When the two objects of whose relative orientation has to be determined rotate reciprocally, then flexible elongated element 42 is subject to a bending that produces a length variation of the fibres not located at neutral axis 100. In particular, the fibre located at eccentric line 105 is subject to a length variation ΔL . This length variation of fibre 105 can be determined by means of a sensor 47, for example a Hall effect sensor, which detects the movement of a cable 45 located in a channel 44 made in the element end 42. In particular, sensor 47 measures the movement of a magnet 46 connected to an end of cable 45 and sliding in an enlarged portion 44a of channel 44.

The goniometric sensor can be inserted after the moulding of the constraint generator or embedded in the plastic matrix of the constraint generator. In a further embodiment, the goniometric sensor is made directly in constraint generator 10, carrying out a measure of lengthening of a fibre different from the neutral axis of constraint generator 10 same, in a way similar to the goniometric sensor shown above.

The type of goniometric sensor used, obviously, is exemplifying and not limitative, and goniometric sensors of other type can be used capable of measuring the rotation of the two ends of constraint generator 10.

- 13 -

According to a particular aspect of the invention, if the orientation has to be measured of a first object capable of rotating about three axes with respect to a second object, the use is provided of three constraint generators 10 connected rigidly in series at the ends 5 (figure 11). In particular, the three constraint generators 10 are oriented according to the different bending planes, so that each sensor 40 present in the corresponding constraint generator 10 measures the bending in a different plane. Therefore, the relative rotational movement of the first object with respect to the second object is computed, in this case, combining the measures of angular movements in each flexion plane.

This solution can be, for example, used for measuring the movement of arm 76 of an individual with respect to the shoulder (figure 16). In this case, considering the movement of the arm with respect to the shoulder 75 as a spherical movement characterised by 3 independent degrees of freedom, such rotations are measurable with device 50 for measuring the rotation of arm 76 with respect to shoulder 75, comprising the three constraint generators 10 in series and the relative three goniometric sensors 40 to it associated.

Always with reference to figure 16, first constraint generator 10a has a free end 5a integral to shoulder 75 and is oriented for bending in a first plane. Second constraint generator 10b has end 5a rigidly connected to end 5b of first generator 10a and is oriented for bending in a second plane orthogonal to the first flexion plane. Third constraint generator 10c has in turn an end 5a rigidly

- 14 -

connected to end 5b of second generator 10b, it is oriented for bending in a third plane orthogonal to the second bending plane and has the free end 5b connected to a support 80 integral to arm 76 by means of a belt 81.

5 Similarly, a device 20 for measuring the rotation of forearm 77 with respect to arm 76 comprises a constraint generator 10 and a relative goniometric sensor 40. In this case, a first end 5a of constraint generator 10 is mounted on a support 80 integral to arm 76 by means of a belt 81
10 and the other end 5b is fixed to a support 82 integral to forearm 77 by means of a belt 83 (figure 16). Finally, if at end 5b of device 20 a rod 31 is connected, as detailed in figures from 17 to 19, having a free end at the wrist 65 and provided with a goniometric sensor 40 (with or
15 without constraint generator), it is possible to measure also the rotation of the wrist 65 with respect to arm 76.

Notwithstanding reference has been made mainly to the movement of an arm with respect to a shoulder, a forearm and a wrist, the above mentioned device can be easily
20 implemented by a skilled person for measuring the motion of other parts of the body such as legs, head, trunk, etc.

The foregoing description of a specific embodiment will so fully reveal the invention according to the conceptual point of view, so that others, by applying current
25 knowledge, will be able to modify and/or adapt for various applications such an embodiment without further research and without departing from the invention, and it is therefore to be understood that such adaptations and modifications will have to be considered as equivalent to the specific

- 15 -

embodiment. The means and the materials to realise the different functions described herein could have a different nature without, for this reason, departing from the field of the invention. It is to be understood that the phraseology
5 or terminology employed herein is for the purpose of description and not of limitation.

- 16 -

CLAIMS

1. Device for measuring the relative orientation of at least a first object with respect to a second object free from said first object, or connected to it but with independent movement, wherein said orientation is carried out according to at least one degree of freedom comprising:
- at least one goniometric sensor for said or each degree of freedom suitable for measuring the variation of orientation in a plane;
 - at least one constraint generator for said or each goniometric sensor for causing the latter to move in said plane;
- characterised in that**
- said or each constraint generator being a flexible elongated element having a longitudinal axis with a low flexional stiffness in a first plane passing through the said axis and a high flexional stiffness in a second plane orthogonal to said first plane and passing through the said axis, whereby said element is flexible only in said first plane.
2. Device, according to claim 1, wherein said constraint generator has high stiffness to torsion and to tensile stress.
3. Device, according to claim 1, wherein said or each goniometric sensor is located in a housing that crosses longitudinally said constraint generator, said goniometric sensor measuring the relative angular movement of said objects in a bending plane of said

- 17 -

constraint generator.

4. Device, according to claim 1, wherein said or each constraint generator has a plurality of substantially parallel portions having larger cross section alternated to a plurality of portions with smaller cross section, whereby such smaller cross sections confer to the structure a big flexional capacity in a plane and in the meantime a big flexional stiffness in a plane orthogonal to it, as well as a big stiffness to torsion and to tensile stress.
5. Device, according to claim 1, wherein said or each constraint generator is an plate shaped element from which projections extend substantially bellow-like.
6. Device, according to claim 5, wherein said bellow-like projections have structure chosen among: helical; alternated annular portions having larger and smaller cross section.
7. Device, according to claim 1, wherein said constraint generator has flanges orthogonal to said axis for fastening at its ends more constraint generators 1 in series or for fastening to the objects whose rotation must be detected.
8. Device according to claim 1, wherein said goniometric sensor comprises:
 25. + a flexible elongated element that extends between a first and a second object, said element having a neutral axis, which does not change its own length when bending, and at least one fibre spaced apart from said neutral

- 18 -

axis and that extends from said first to said second object;

- means for measuring the length variation of said fibre as the relative rotation varies between said first and said second object, said relative rotation being proportional to said length variation.

5
9. Device for measuring the relative orientation of a first object capable of rotating about more axes independent with respect to a second object
10 **characterised in that** it comprises a plurality of constraint generators, according to claims from 1 to 7, connected rigidly in series at the ends, and in particular a constraint generator for each axis of rotation or rotational degree of freedom, said
15 constraint generators being oriented according to the different flexion planes, so that each sensor present in the corresponding constraint generator measures the bending in a different plane, said relative rotational movement of said first object with respect to said
20 second object being determined by means of a combination of measures of angular movements in each flexion plane.

10. Device for measuring the rotation of the arm with respect to the shoulder of an individual
25 **characterised in that** it comprises three constraint generators, according to claims from 1 to 8, arranged in series associated to three goniometric sensors, wherein the first constraint generator has a free end integral to the shoulder and is oriented for bending

- 19 -

in a first plane, the second constraint generator in a second plane orthogonal to the first and the third constraint generator in a third plane orthogonal to the second and having the free end integral to said arm.

5
11. Device for measuring the rotation of the forearm with respect to the arm of an individual **characterised in that** it comprises a constraint generator and a relative goniometric sensor, according to claims from
10 1 to 8, with an end integral to the arm and the other end integral to the forearm.

12. Device for measuring the rotation of the wrist of an individual with respect to a point of the arm, which point during the rotation of the wrist remaining
15 substantially fixed, **characterised in that** it comprises at least one goniometric sensor according to claim 8 arranged with an end integral to the wrist and with the other end constrained to said fixed point, said goniometric sensor measuring the rotation of the
20 wrist with respect to said second point of the arm.






13. Data suit for measuring the angular rotation of the arm with respect to the shoulder, of the forearm and of the wrist with respect to the arm of an individual **characterised in that** it comprises:






- 25 - a device for measuring the rotation of the arm with respect to the shoulder according to claim 10;
- a device for measuring the rotation of the forearm with respect to the arm, according to claim 11, arranged orthogonally to said device for measuring the

- 20 -

rotation of the arm with respect to the shoulder;

- a device for measuring the rotation of the wrist, comprising at least one goniometric sensor according to claim 12, arranged with an end integral to the wrist and with the other end constrained to said fixed point, said goniometric sensor measuring the rotation of the wrist with respect to said second point of the arm.

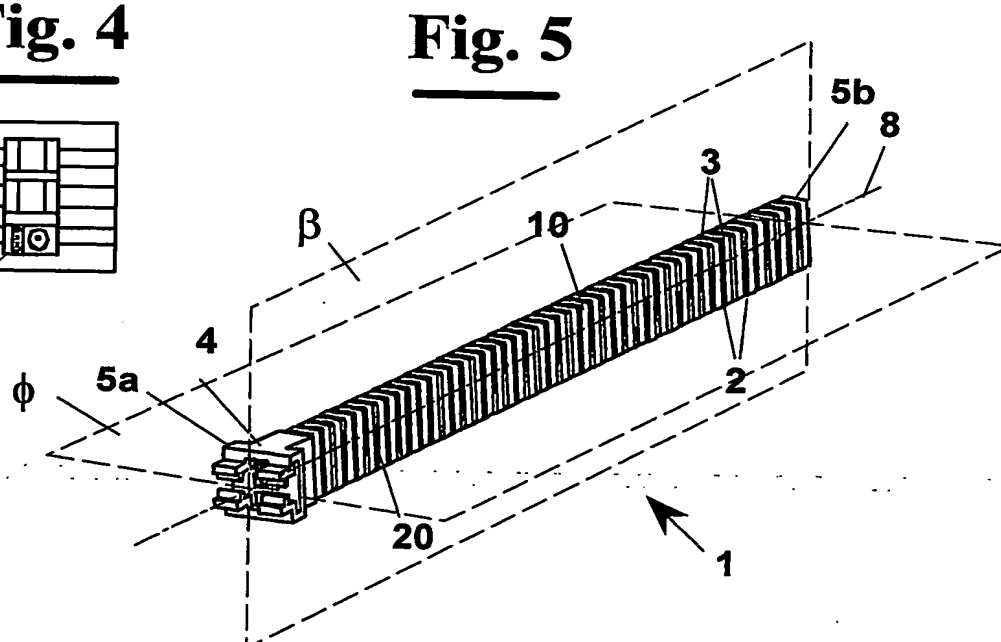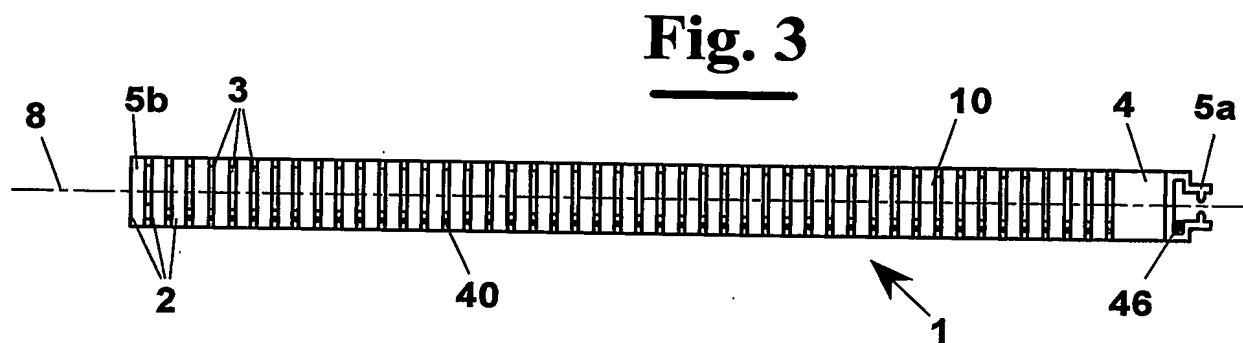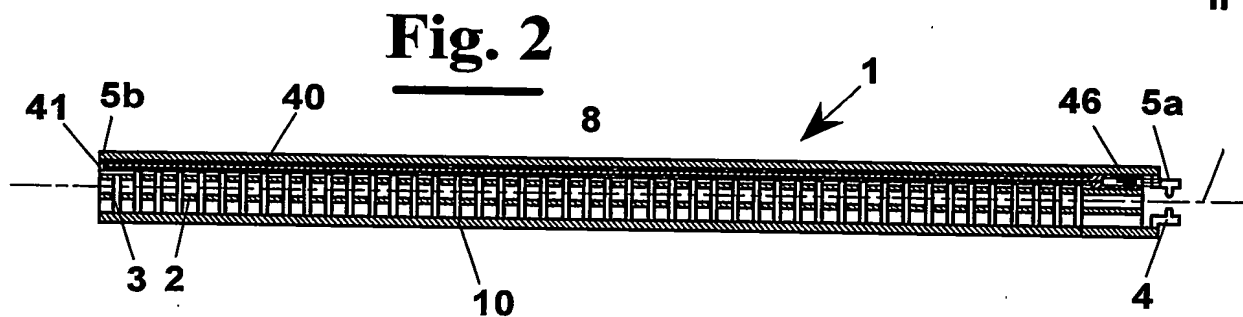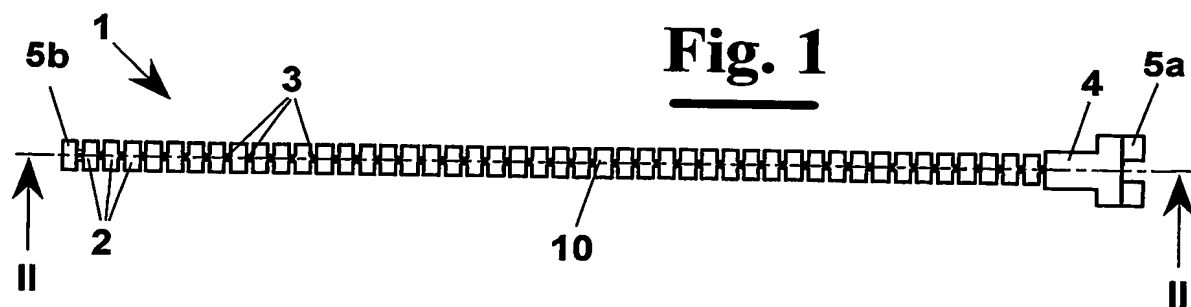

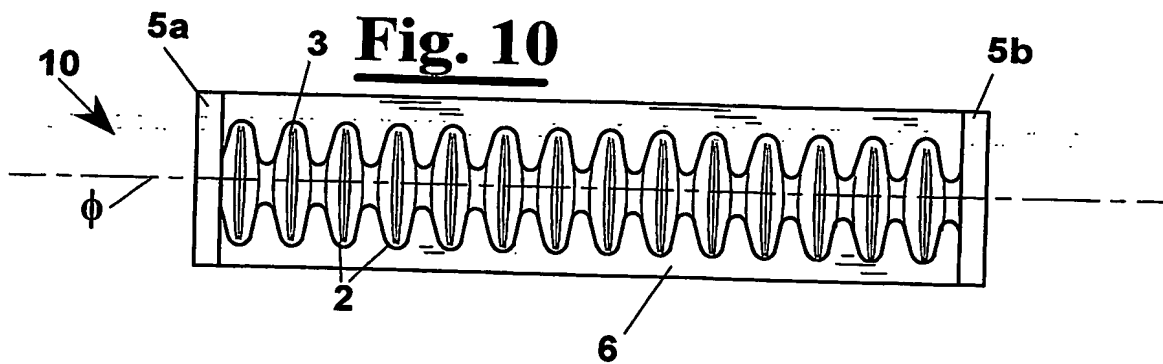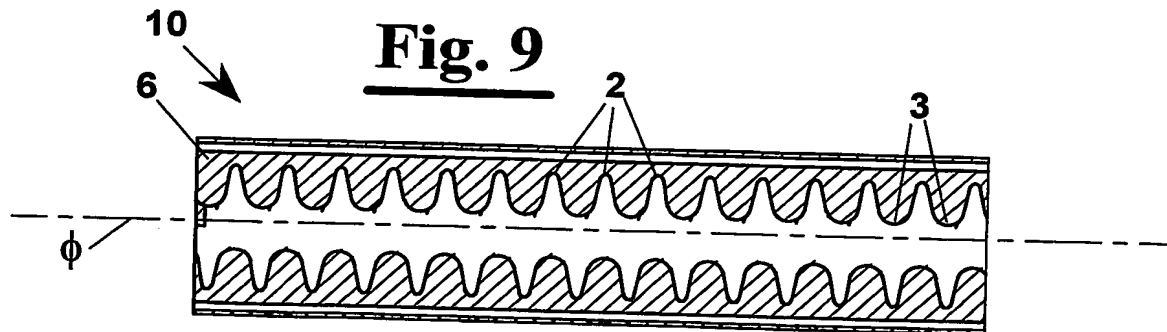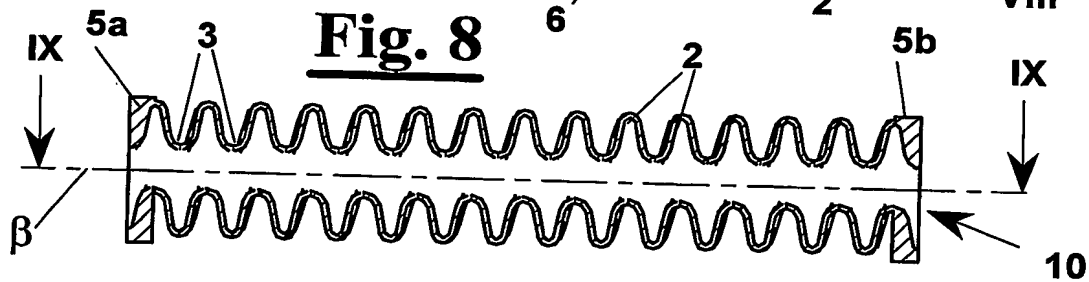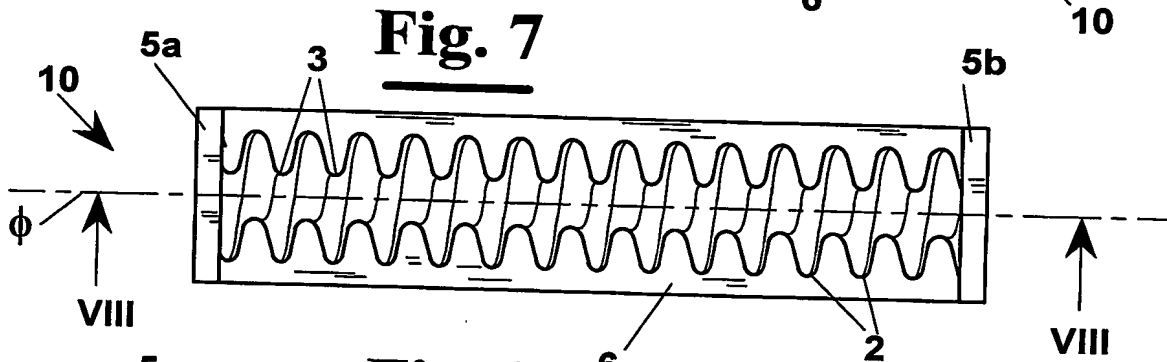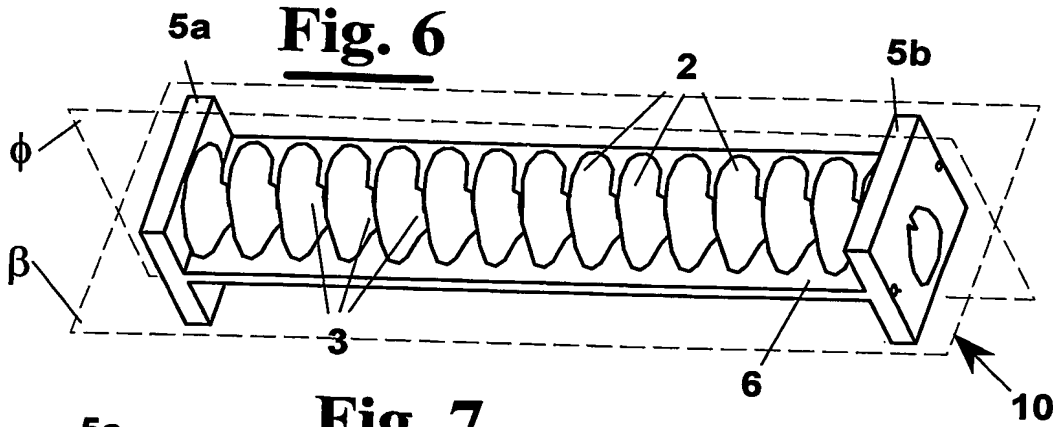


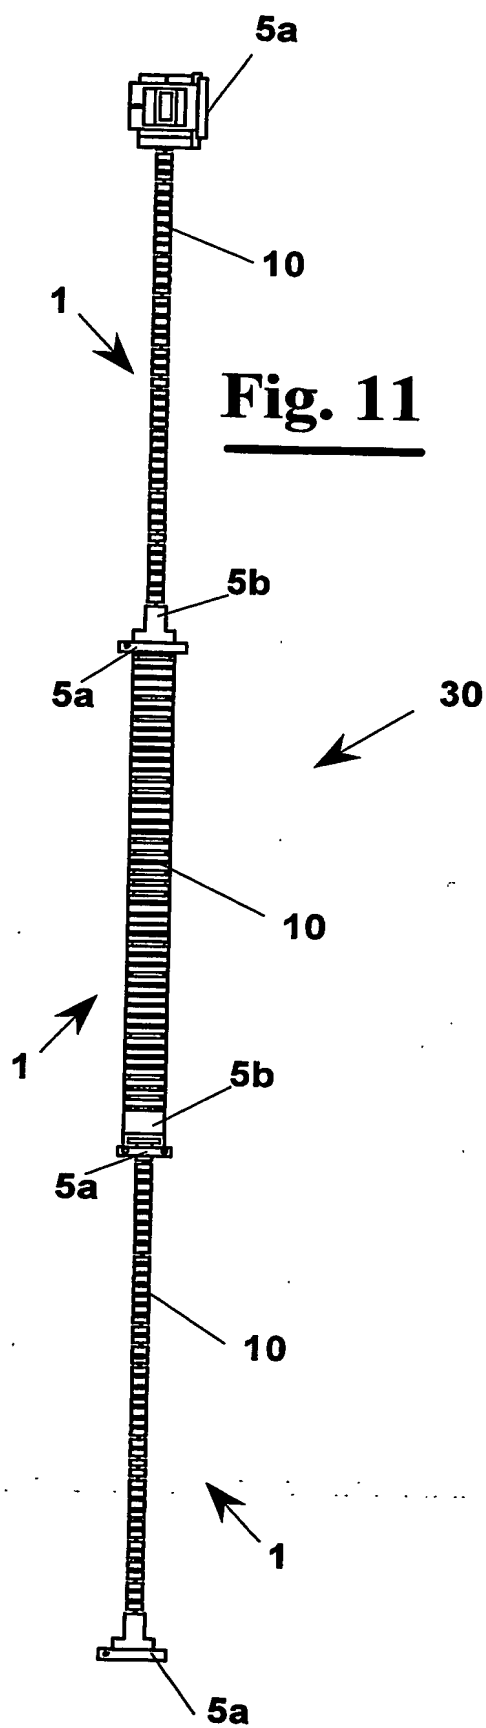


Fig. 12

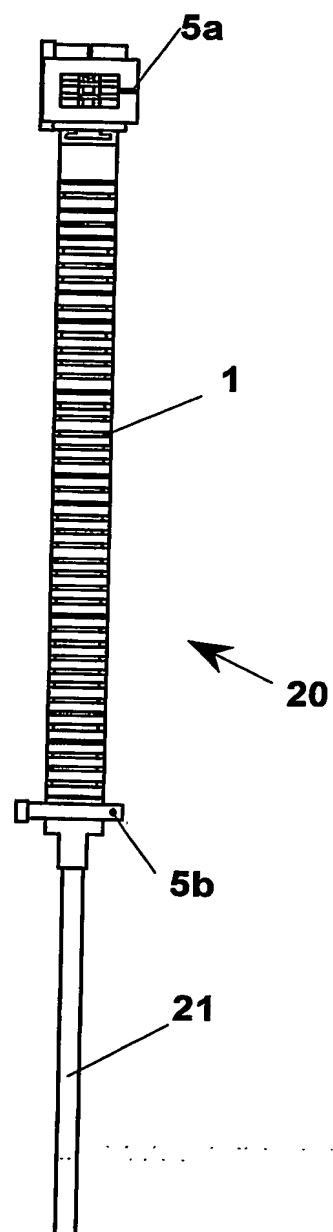

- 4/6 -



Fig. 13**Fig. 14**



Fig. 15**Fig. 16**

Fig. 17




Fig. 18

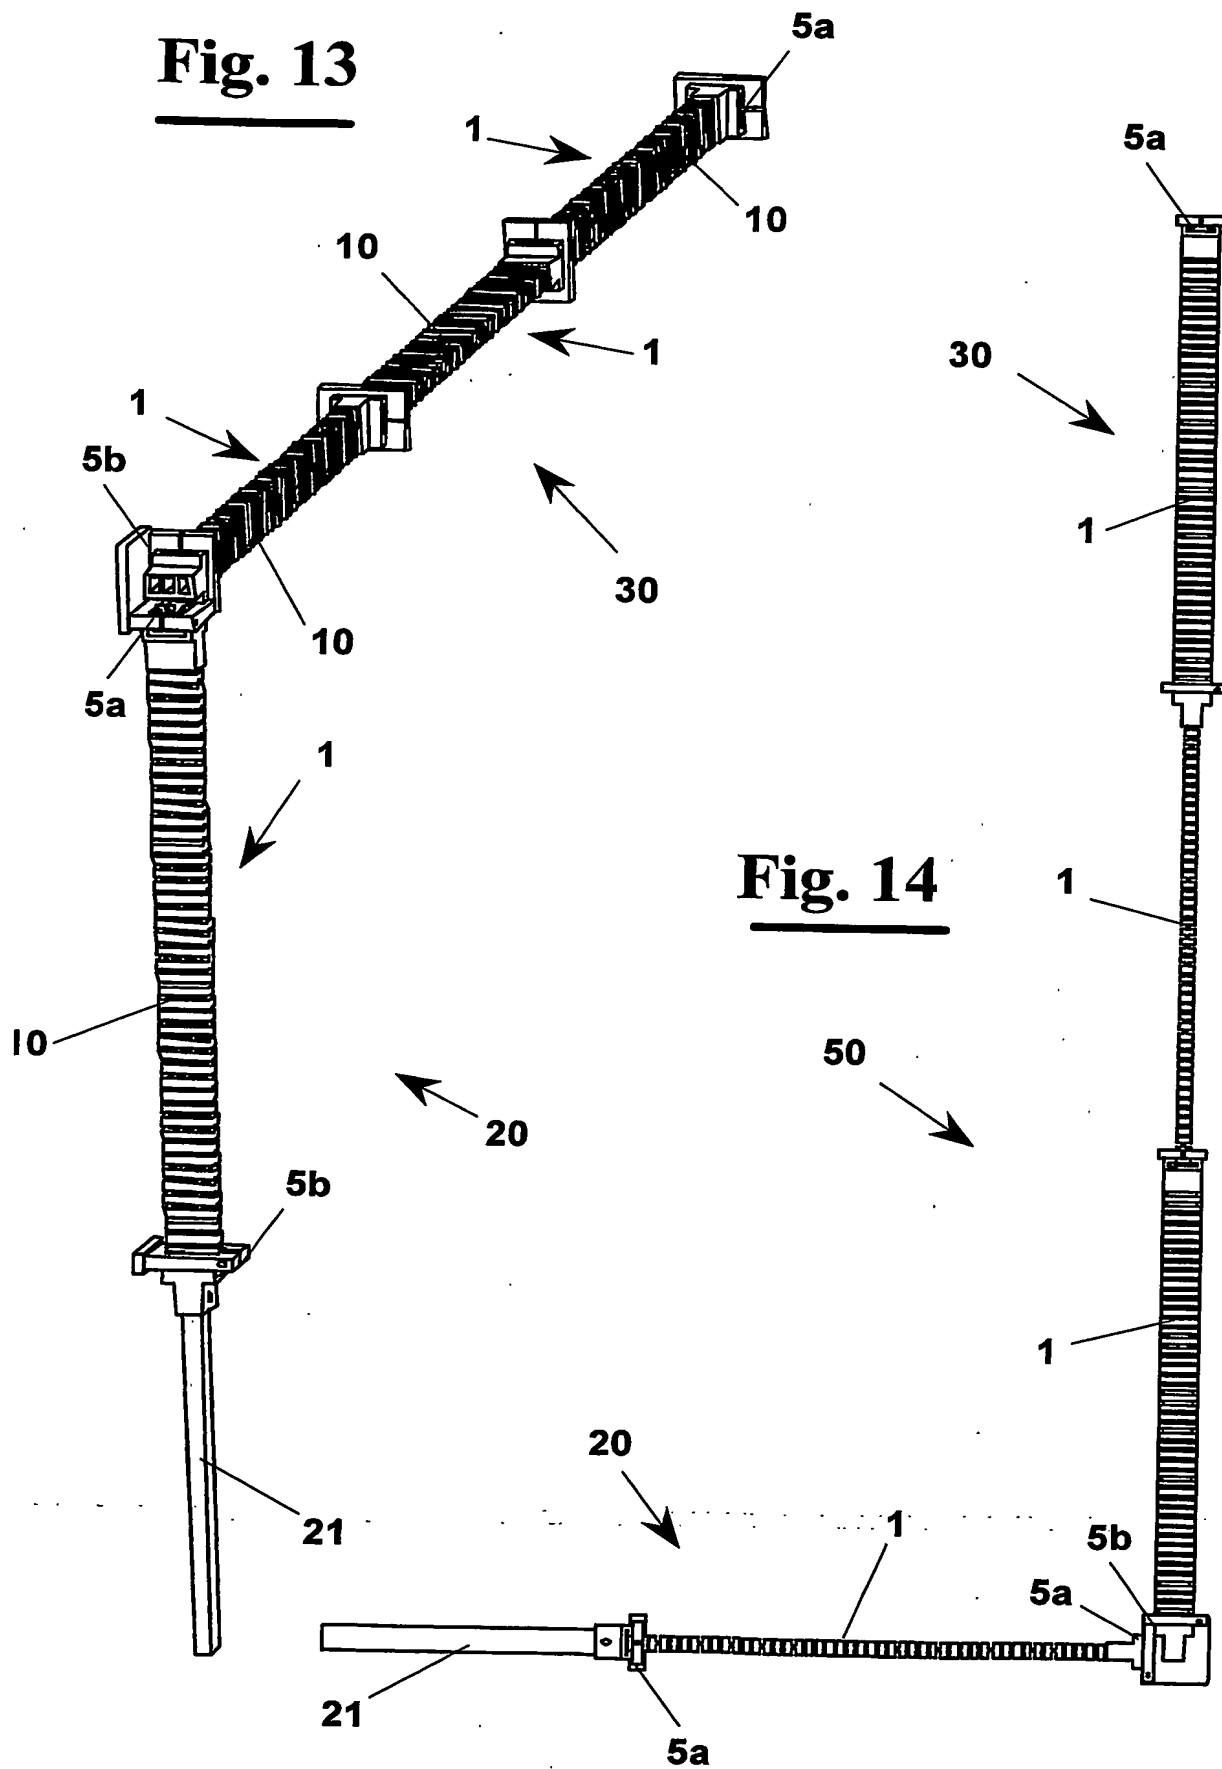
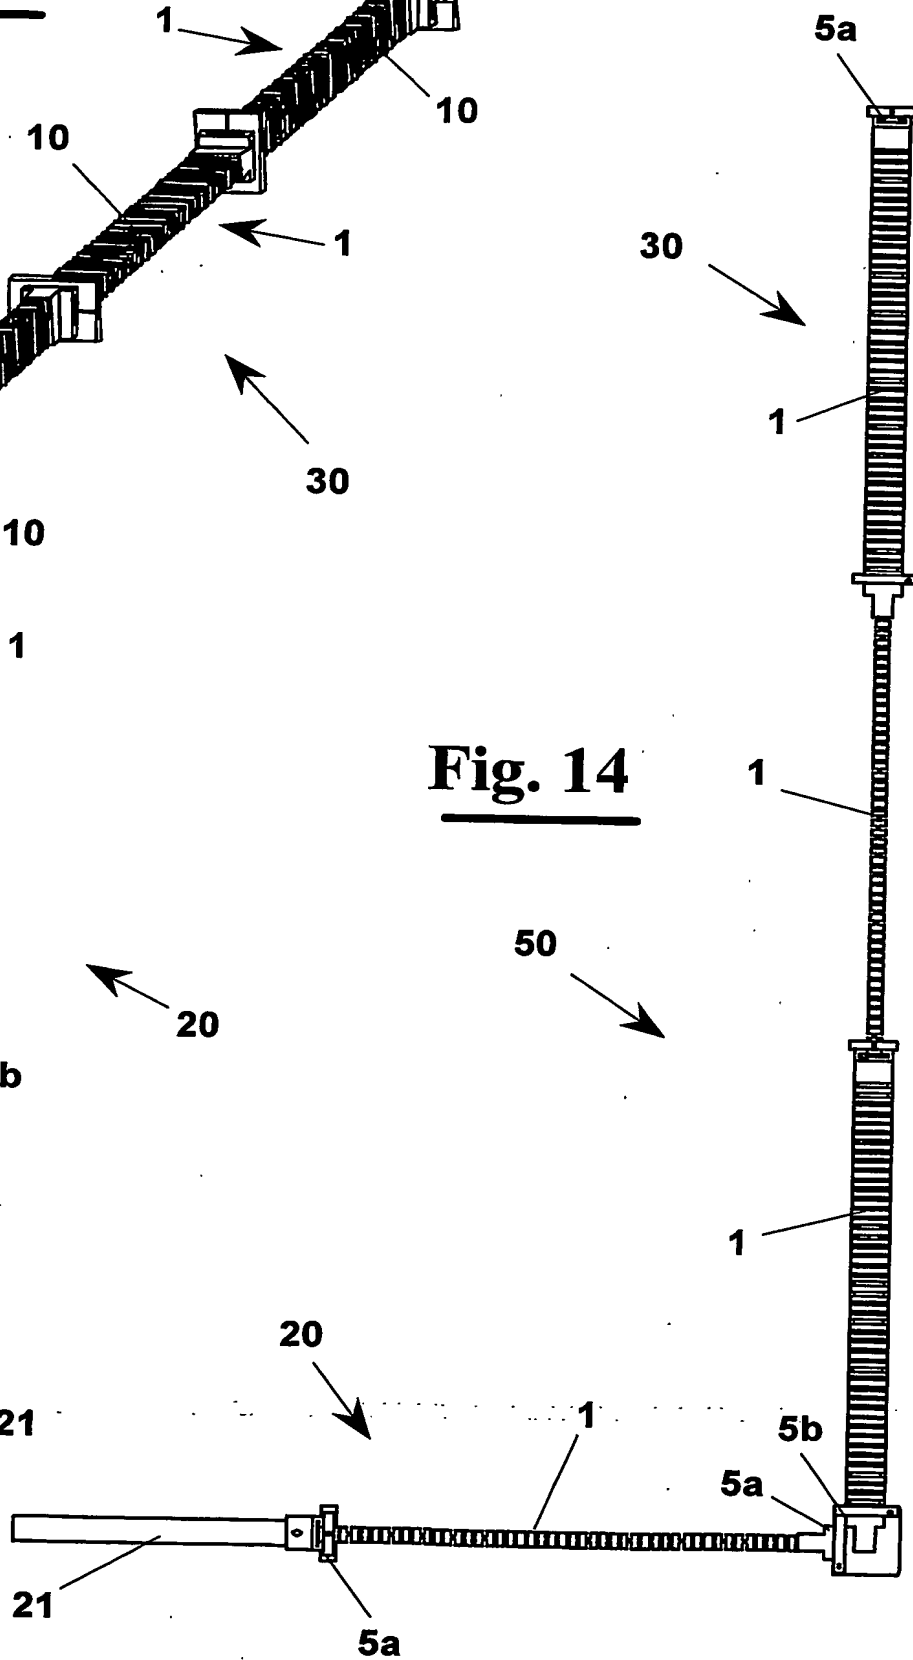


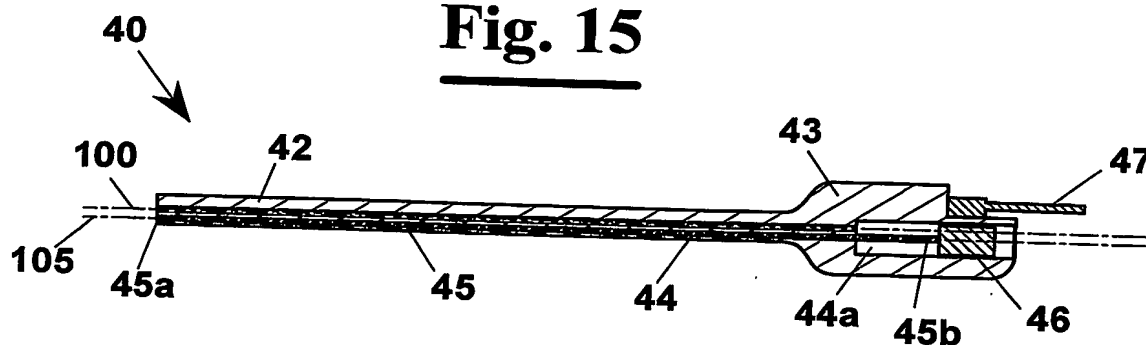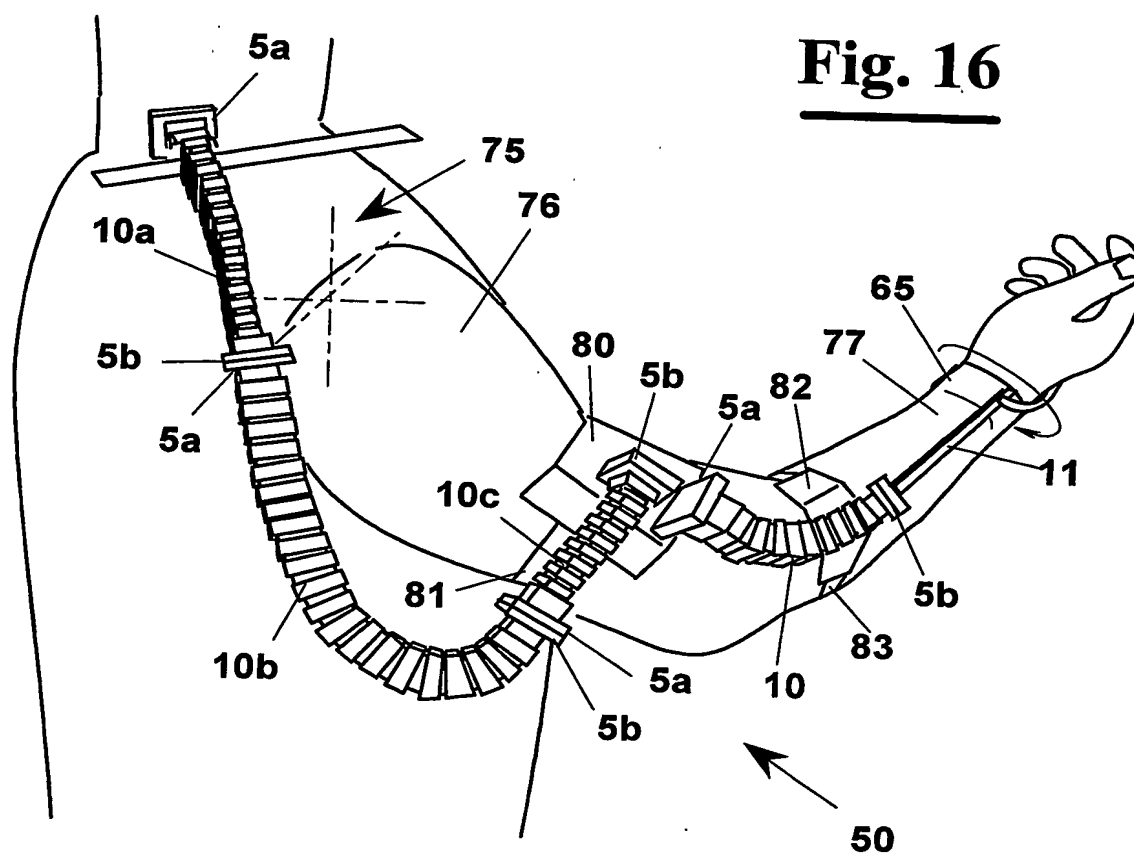Fig. 19

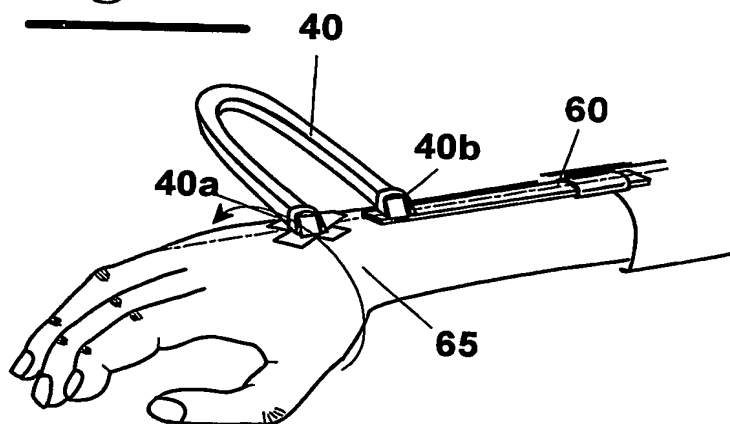

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 02/05666

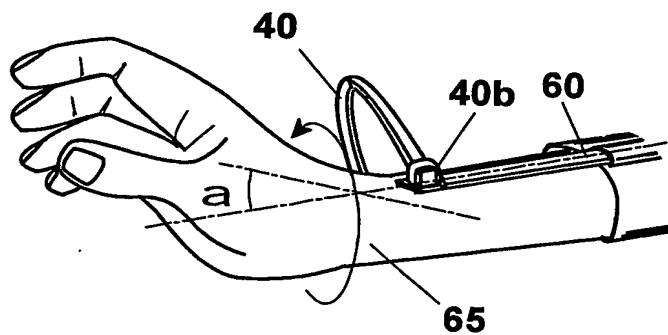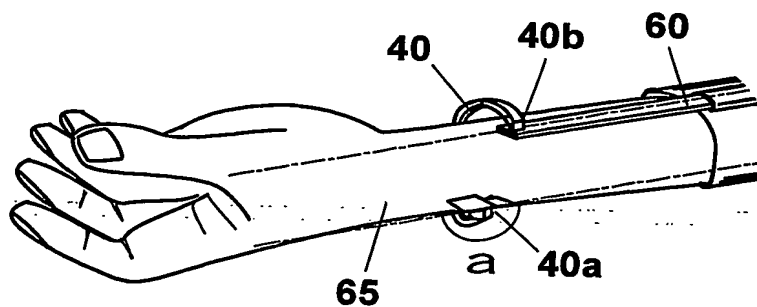A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B5/103

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| X | US 6 050 962 A (ANANNY JOHN M ET AL) 18 April 2000 (2000-04-18) cited in the application column 12, line 39-55; figures 7B, 8 column 13, line 1-26; figures 11, 12 column 14, line 6-18; figures 19A, 19B column 14, line 39-46; figure 22 column 19, line 8-21; figure 38 | 1, 2, 4, 7-13 |
| A | WO 89 11247 A (JOSEFSSON BERTIL) 30 November 1989 (1989-11-30) abstract | 1-13 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *G* document member of the same patent family

Date of the actual completion of the international search

28 August 2003

Date of mailing of the international search report

04/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dhervé, G

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 02/05666

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| US 6050962 | A | 18-04-2000 | US 2003083596 A1 | 01-05-2003 |
| | | | US 6428490 B1 | 06-08-2002 |
| | | | AU 7161598 A | 13-11-1998 |
| | | | WO 9847426 A1 | 29-10-1998 |
| | | | US 6110130 A | 29-08-2000 |
| WO 8911247 | A | 30-11-1989 | SE 455567 B | 25-07-1988 |
| | | | SE 8605103 A | 29-05-1988 |
| | | | WO 8911247 A1 | 30-11-1989 |

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.